

A Computational Approach inspired by Simulated Annealing to study the Stability of Protein Interaction Networks in Cancer and Neurological Disorders


Data Mining and Knowledge Discovery

Kristina Ibáñez^{1,2}, María Guijarro¹, Gonzalo Pajares¹, Alfonso Valencia^{2,§}

¹Departamento Ingeniería del Software e Inteligencia Artificial, Facultad Informática, Universidad Complutense, 28040 Madrid, Spain

²Structural Biology and Biocomputing Programme, Spanish National Cancer Research Centre (CNIO), 28029 Madrid , Spain

[§] **Corresponding author:** Dr. Alfonso Valencia. Tel: +34 917328000; Fax: +34 912246976;
E-mail: avalencia@cni.es

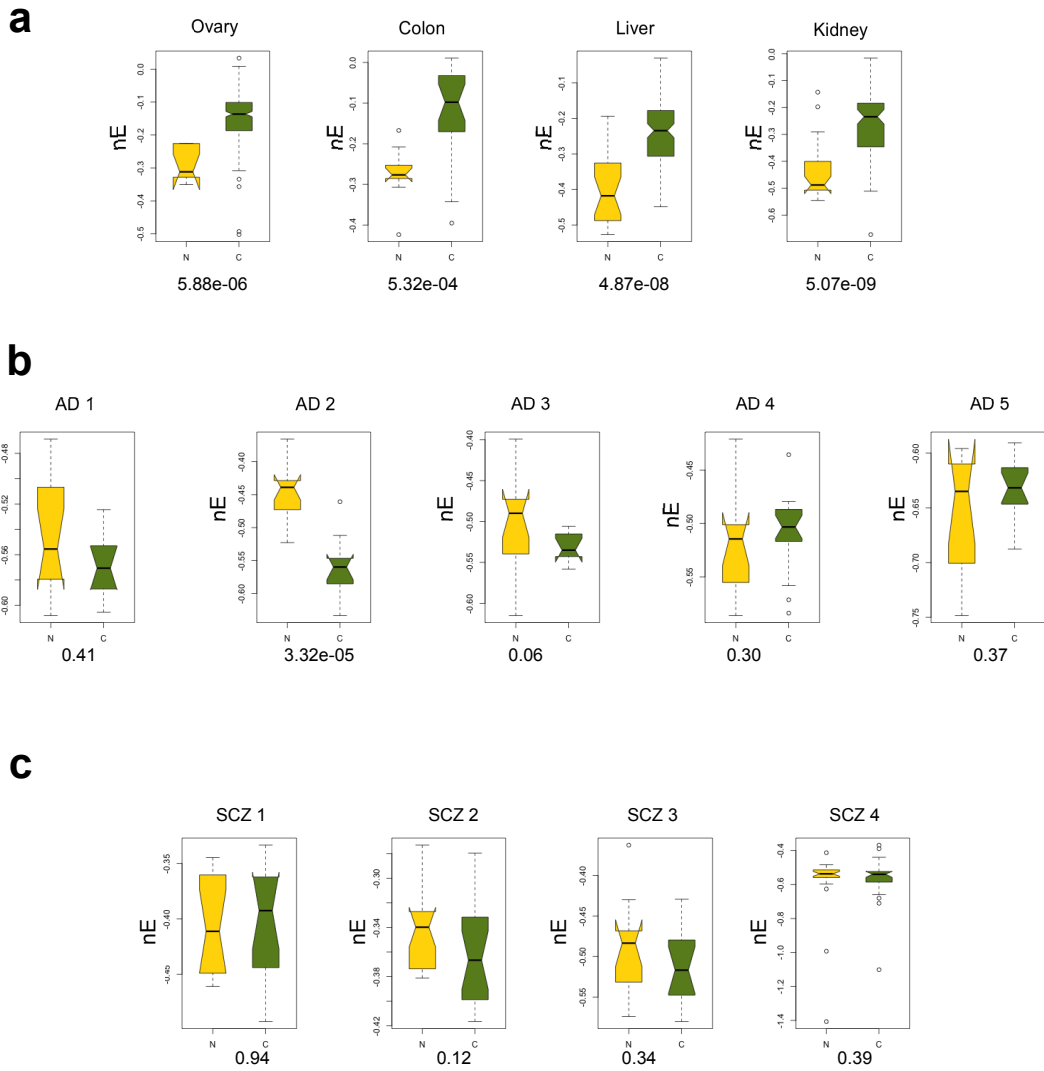

Online Resource 5 nE distribution mapping all the genes in **(a)** normal (N) and cancer (C) states (Ovarian, Colon, Liver and Kidney). **(b)** Normal (N) and AD (C). **(c)** Normal (N) and SCZ disease (C) state in the HIPPIE network. The Wilcoxon-rank p-value

value is presented below x-axis